



OEM72 CO – Carbon Monoxide Monitor

DISPLAY DETAILS

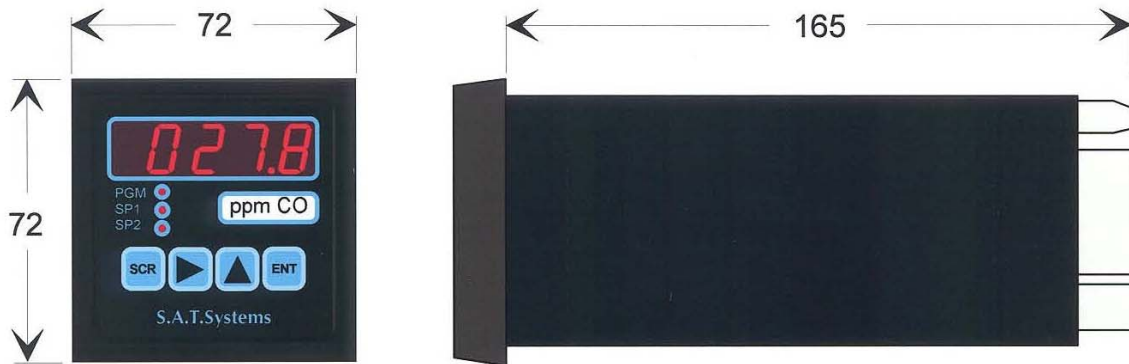

SENSOR DETAILS

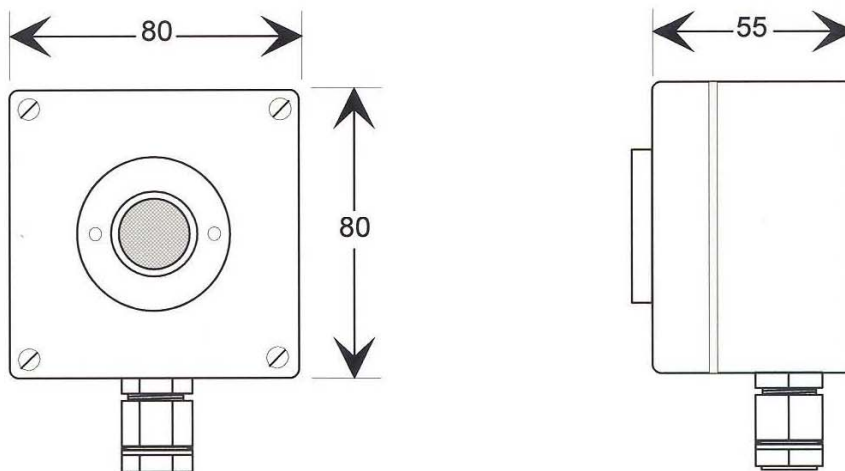



639 Manhattan Blvd.
Harvey, LA 70058 USA
TEL: (504) 362-8124
FAX: (504) 362-3600
www.aquaairind.com
EMAIL sales@aquaairind.com

OEM72 CO – Carbon Monoxide Monitor Cont.

The OEM72 CO Carbon Monoxide monitor is a cost effective unit in modular form that consists of a panel mounted display unit and a separate sensor that can be installed remotely.

This unit uses a high stability electro-chemical sensor with built in temperature compensation.

The display has high and low set points with audio visual alarm and mute circuit.

Day to day calibration is carried out from the front panel. All the calibration and alarm parameters are retained in a non volatile memory.

Specifications	
Operating Principle	Electro-chemical
Range	0 to 100 ppm CO
Display Resolution	0.1 ppm
Overall Resolution	0.5 ppm CO
Temperature Effect	0.5 ppm/°C
Response Time	90% in 35 Seconds
Sensor Life	2 Years
Sample Flow	10 to 300 ml/min
Housing	Separate display and sensor
Relay Output	8 Amp change-over relay
Options	Analogue/Serial output
Warranty	12 Months
Power Requirements	110, 220 VAC or 24 VDC 6 W