



## OEM72 H – Humidity Monitor

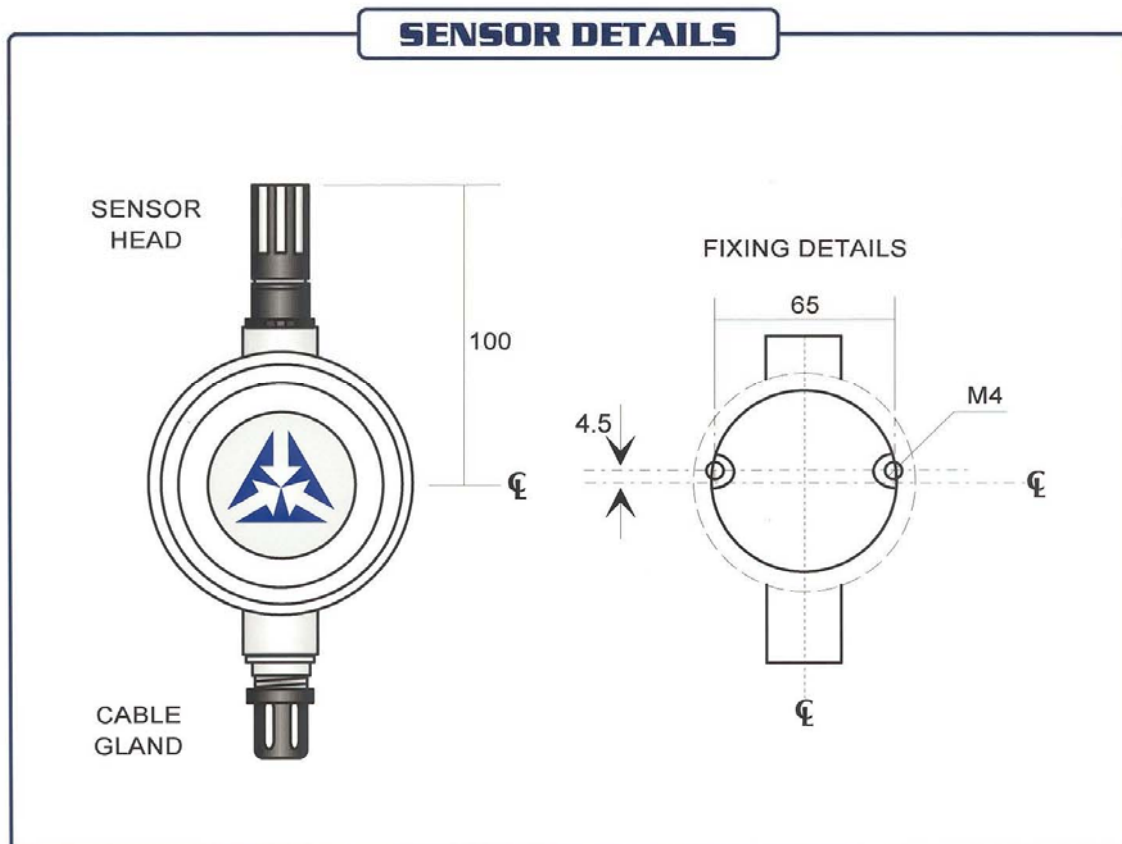

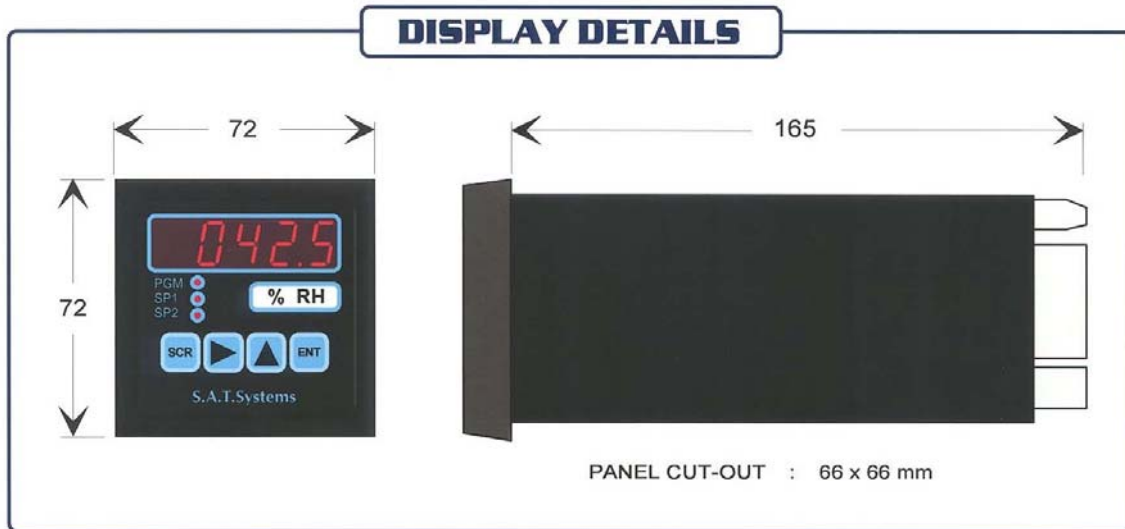

639 Manhattan Blvd.  
 Harvey, LA 70058 USA  
 TEL: (504) 362-8124  
 FAX: (504) 362-3600  
[www.aquaairind.com](http://www.aquaairind.com)  
 EMAIL [sales@aquairind.com](mailto:sales@aquairind.com)

## OEM72 H – Humidity Monitor Cont.

The OEM72 H, Humidity monitor is a modular unit with separate sensor and display unit.

Humidity is measured using a capacitive Polymer sensor. The sensor unit can also be used as a combined temperature and humidity sensor.

The display module has a high and low, user programmable, set point with audio and visual alarms and mute circuit.

Day to day calibration can be carried out from the front panel. All the calibration and alarm parameters are retained in a non volatile memory.

<b>Specifications</b>	
<b><u>HUMIDITY</u></b>	
Operating Principle	Capacitive polymer
Range	0 to 100% RH
Accuracy	2% RH
<b><u>DISPLAY UNIT</u></b>	
Housing	Separate display & sensor
Relay Output	8 Amp change-over relay
Operating Temperature Range	0 to 45°C
Options	Analogue/Serial output
Power Requirements	110, 220 VAC or 24 VDC 6 W
Warranty	12 Months