



OEM72 T – Temperature Monitor

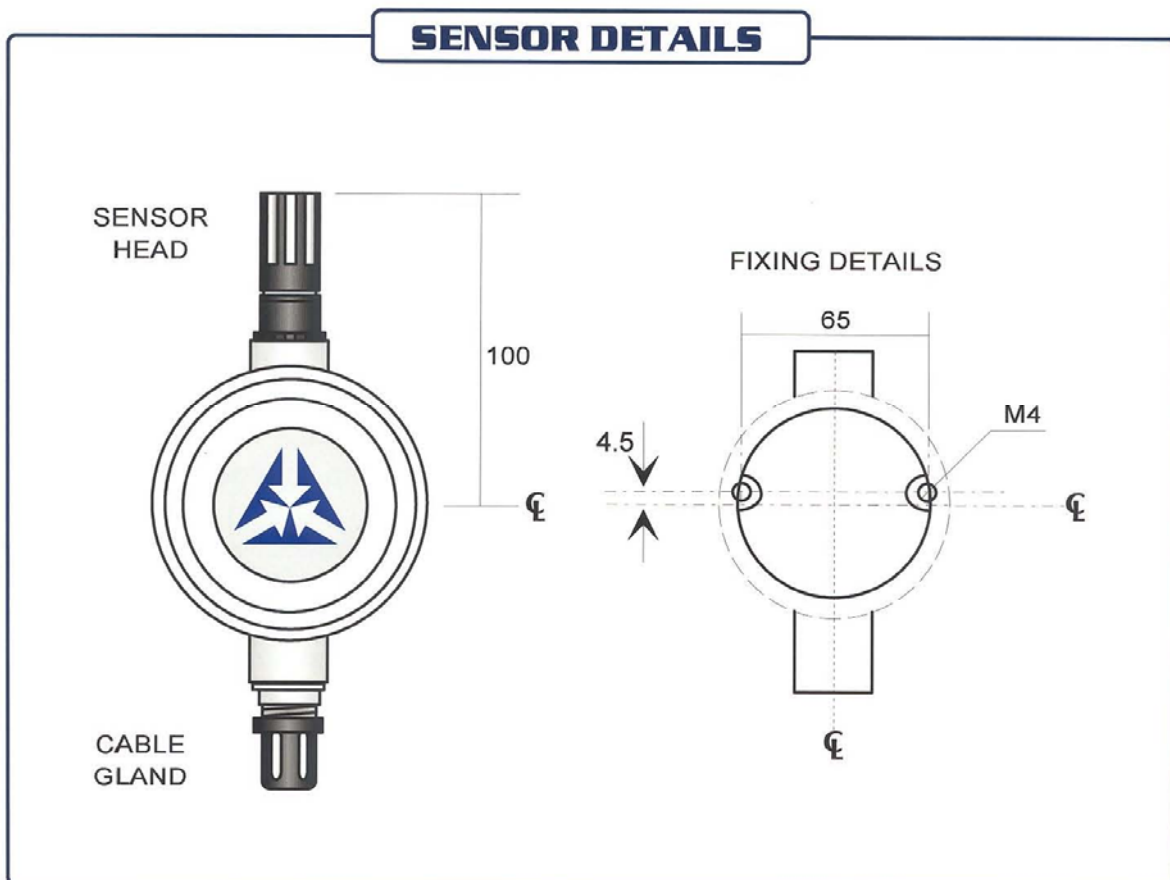

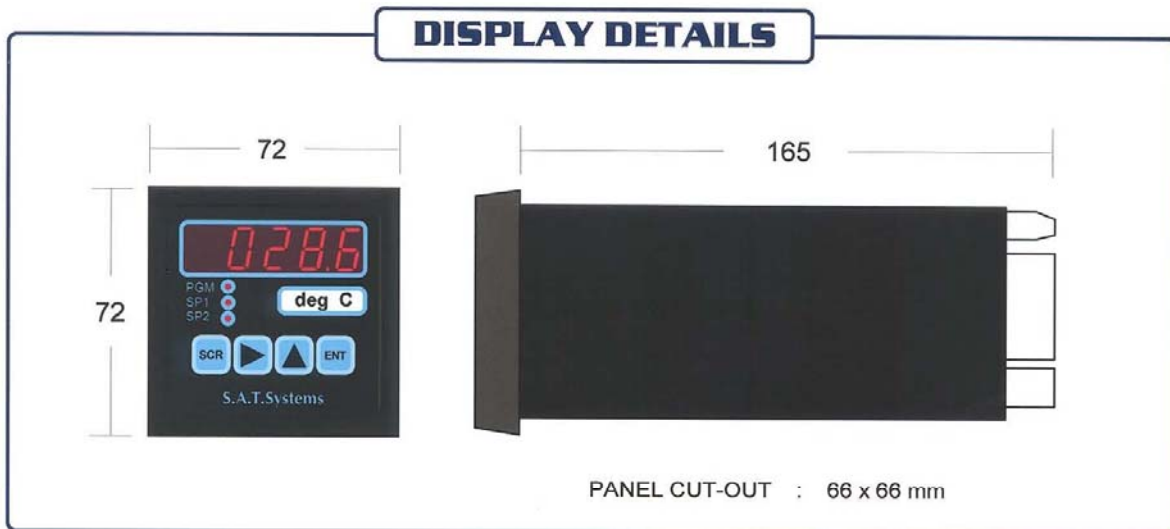

639 Manhattan Blvd.
 Harvey, LA 70058 USA
 TEL: (504) 362-8124
 FAX: (504) 362-3600
www.aquaairind.com
 EMAIL sales@aquaairind.com

OEM72 T – Temperature Monitor Cont.

The OEM72 T, Temperature monitor is a modular unit with separate sensor and display unit.

Temperature is measured using a high stability Molybdenum sensing element. The sensor unit can also be used as a combined temperature and humidity sensor.

The display module has a high and low, user programmable, set points with audio visual alarms and mute circuit.

Day to day calibration can be carried out from the front panel. All the calibration and alarm parameters are retained in non volatile memory.

Specifications

<u>TEMPERATURE</u>	
Operating Principle	Molybdenum resistance element
Range	0 to 50°C
Accuracy	0.1°C
<u>DISPLAY UNIT</u>	
Housing	Separate display & sensor
Relay Output	8 Amp change-over relay
Operating Temperature Range	0 to 45°C
Options	Analogue/Serial output
Power Requirements	110, 220 VAC or 24 VDC 6 W
Warranty	12 Months