



OEM72 O2 Oxygen Percentage Monitor

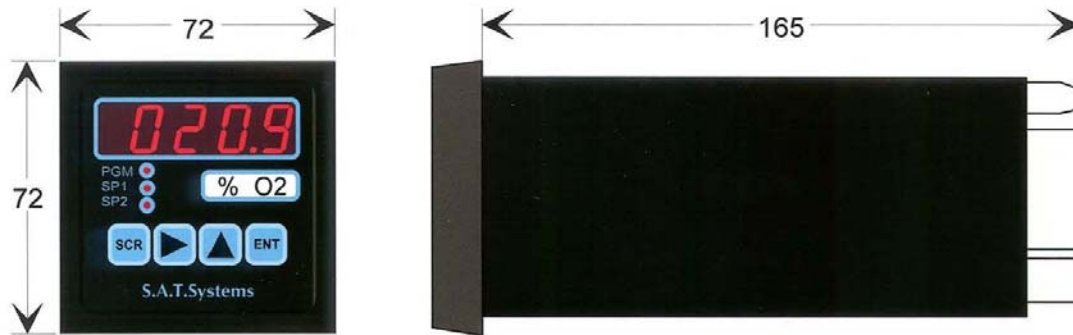


PANEL CUT-OUT : 66 x 66 mm

PANEL MOUNT DISPLAY UNIT

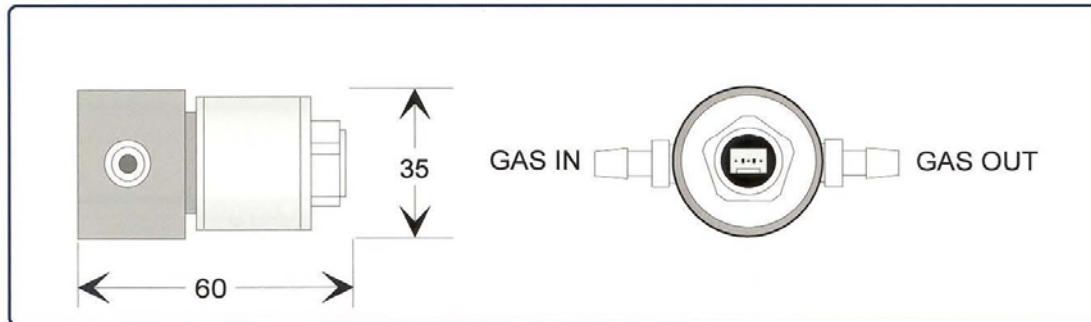

FLOW THROUGH SENSOR OPTION

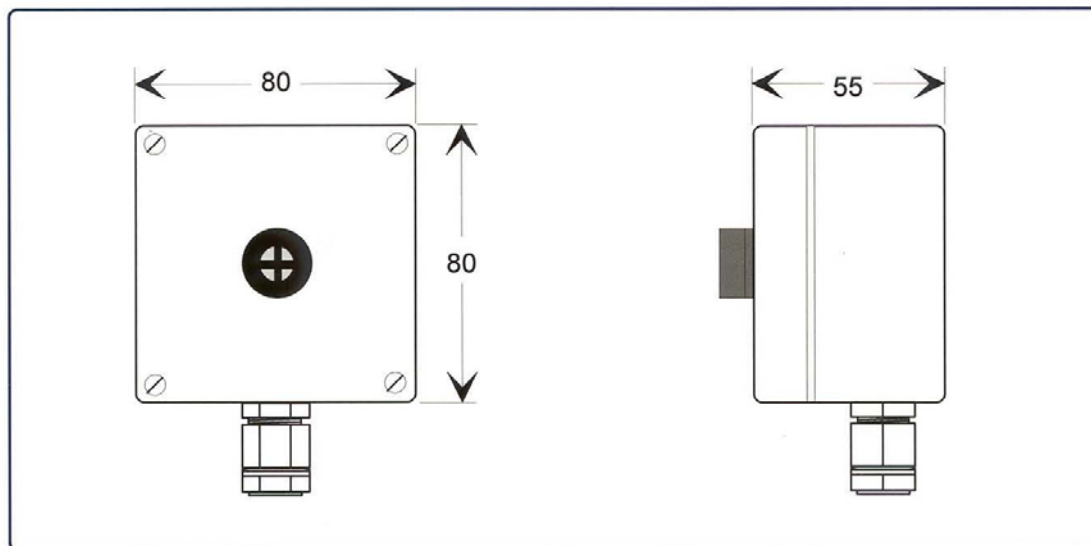

WALL MOUNTED SENSOR OPTION



639 Manhattan Blvd.
 Harvey, LA 70058 USA
 TEL: (504) 362-8124
 FAX: (504) 362-3600
www.aquaairind.com
 EMAIL sales@aquairind.com

OEM72 O2 Oxygen Percentage Monitor Cont.

The OEM72 O2 Oxygen monitor in modular form that consists of a panel mounted display unit and a separate sensor that can be installed remotely.

This unit uses a high stability electro-chemical sensor with built in temperature compensation.

The display has high and low set points with audio visual alarm and mute circuit.

Day to day calibration is carried out from the front panel. All the calibration and alarm parameters are retained in non volatile memory.

Specifications	
Operating Principle	Electro-chemical
Ranger	0 to 100% Oxygen
Accuracy	1% of Full Scale
Response Time	90% in 12 Seconds
Sample Flow	10 to 300 ml/min
Housing	Separate display and sensor
Relay Output	8 Amp change-over relay
Options	Analogue/Serial output
Warranty	12 Months
Power Requirements	110, 200 VAC or 24 VDC 6W